


軽量シャックル

ボルト・ナット止めタイプ

■RS

■RB

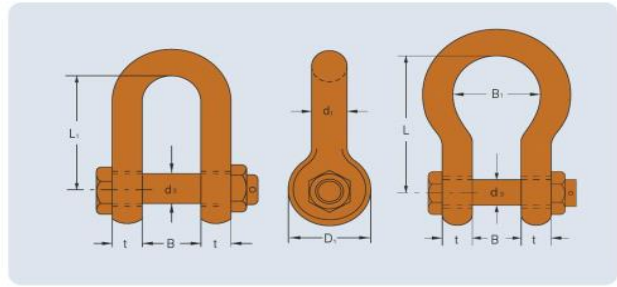

単位 (mm)


呼び 使用荷重 (t)	寸法										計算重量 (kg)	
	t	B	d ₃	RS			RB				RS	RB
				d ₁	L ₁	D ₁	d	B ₁	L	D		
5	22	44	26	22	120	55	26	88	156	55	1.86	2.58
8	26	50	30	26	144	66	30	104	190	66	3.26	4.35
10	30	65	36	30	160	75	36	120	210	80	5.2	7.44
16	38	80	42	38	205	95	44	150	270	100	10.2	14.1
20	42	90	48	42	230	105	55	170	300	110	14.1	22.2
25	50	100	56	50	255	120	65	190	335	125	21	34.4
★32	60	115	64	60	290	135	70	220	380	140	35.4	48.5
★40	65	125	72	65	320	150	80	240	425	160	45.5	68.5
★50	70	140	80	70	360	170	90	270	475	180	61.2	95.5
★63	80	160	90	80	405	190	100	300	530	200	89.1	134
★80	90	180	100	90	455	210	115	340	600	225	124	195
★100	105	200	110	105	510	235	125	380	670	250	180.8	264

★印は取手が付いてます。

捻じ込みタイプ

■RSS

■RBS

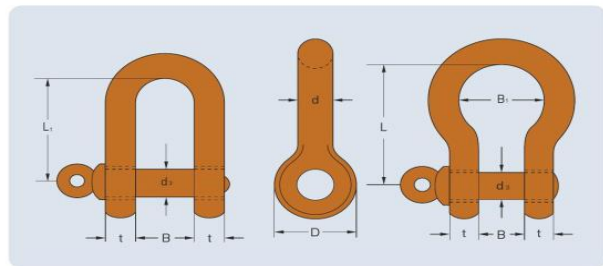

単位 (mm)

呼び 使用荷重 (t)	寸法										計算重量 (kg)	
	t	B	d ₃	RS			RB				RSS	RBS
				d ₁	L ₁	D ₁	d	B ₁	L	D		
5	22	44	26	22	120	55	26	88	156	55	2.41	3.41
8	26	50	30	26	144	66	30	104	190	66	3.44	4.84
10	30	65	36	30	160	75	36	120	210	80	4.87	7.11
16	38	80	42	38	205	95	44	150	270	100	9.78	13.68
20	42	90	48	42	230	105	55	170	300	110	13.37	21.47